




300150

THREE-way ball valve 4 seals with "T" port
 Drive: Inox lever
 Connection: revolving threaded flanges UNI EN 1092-1:2003
 Flow: full
 Material: Aisi 304 - 316
 Measure: from DN 10 to DN 100
 Seals: virgin P.T.F.E.
 Operating temperature: -20°C +160°C
 Outer finish: polished

On request:

- zinc-plated flanges
- ANSI 150 flanges
- ANSI 300 flanges
- Seals made of:
 P.T.F.E. with glass
 P.T.F.E. with carbographite
 High-molecular weight polyethylene

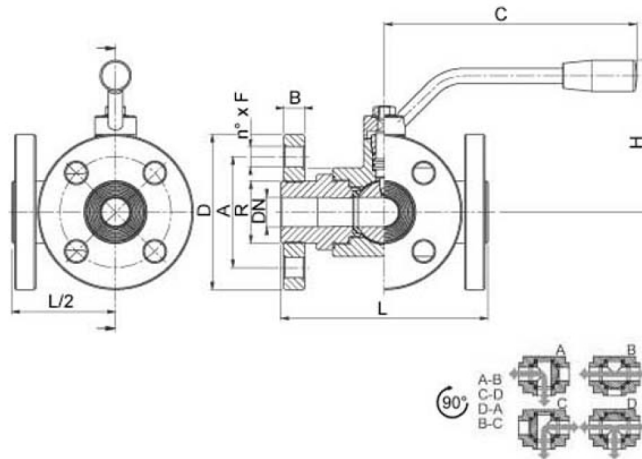

DIN	DN	L	C	H	D	B	R	A	n° x F	PN	Kg	CODE AISI 304	CODE AISI 316
10	10	120	130	85	90	12	30	60	4x14	40	2,70	300150 40810	300150 60810
15	15	130	130	90	95	12	35	65	4x14	40	3,23	300150 41410	300150 61410
20	20	140	170	100	105	14	42	75	4x14	40	4,80	300150 42010	300150 62010
25	25	150	170	110	115	14	51	85	4x14	40	6,18	300150 42610	300150 62610
32	32	180	240	130	140	16	63	100	4x18	40	10,55	300150 43010	300150 63010
40	40	200	240	140	150	16	75	110	4x18	40	13,72	300150 43410	300150 63410
50	50	220	260	150	165	18	89	125	4x18	25	18,15	300150 43810	300150 63810
65 *	65	240	300	160	185	18	110	145	4x18	16	23,15	300150 44410	300150 64410
65 *	65	240	300	160	185	20	110	145	8x18	25	23,50	300152 44410	300152 64410
80 *	80	260	330	175	200	18	120	160	8x18	16	33,47	300150 44810	300150 64810
100 *	100	300	330	190	220	20	140	180	8x18	16	49,00	300150 45410	300150 65410
125 *	Reduced 100	325	330	190	250	22	153	210	8x18	16	-	300150 45510	300150 65510

* Four way