




313001

THREE-way ball valve 4 seals with "L" port
 Drive: ISO 5211 - DIN 3337 flange for actuator
 Connection: ISO 228 female/female/female thread
 Flow: full
 Material: Aisi 304L - 316L
 Measure: from 1/4" to 4"
 Seals: virgin P.T.F.E.
 Operating temperature: -20°C +160°C
 Outer finish: polished

On request:

- ISO 7 thread
- NPT thread
- Seals made of:
 P.T.F.E. with glass
 P.T.F.E. with carbographite
 High-molecular weight polyethylene

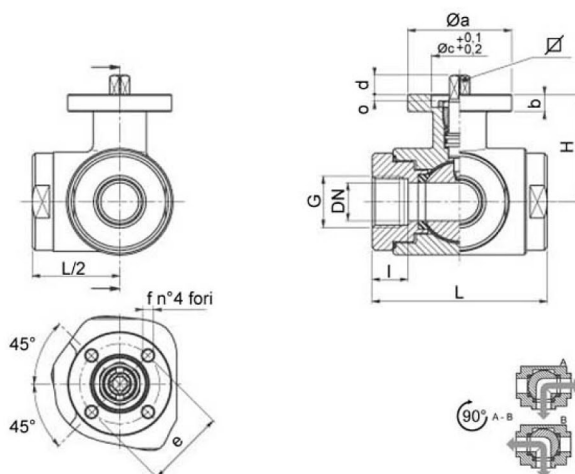

G	DN	L	I	H	PN	KG	ISO-DIN	Ø a	b	Ø c x o	QU.	d	e	f	n°4 bolts	Nm *	CODE AISI 304L	CODE AISI 316L
1/4"	12	72	16	46,5	40	0,96	F.03	46	9	25x3	9	8	36	6	M5x16	10	313001 40410	313001 60410
1/4"	12	72	16	46,5	40	1,00	F.04	54	9	30x3	11	10	42	6	M5x16	10	313001 4041F	313001 6041F
3/8"	12	72	16	46,5	40	0,93	F.03	46	9	25x3	9	8	36	6	M5x16	10	313001 40810	313001 60810
3/8"	12	72	16	46,5	40	0,97	F.04	54	9	30x3	11	10	42	6	M5x16	10	313001 4081F	313001 6081F
1/2"	15	82	18	49	40	1,23	F.03	46	9	25x3	9	8	36	6	M5x16	12	313001 41410	313001 61410
1/2"	15	82	18	49	40	1,29	F.04	54	9	30x3	11	10	42	6	M5x16	12	313001 4141F	313001 6141F
3/4"	20	92	19	56,5	40	1,85	F.04	54	9	30x3	11	10	42	6	M5x16	23	313001 42010	313001 62010
3/4"	20	92	19	56,5	40	2,06	F.05	65	9	35x3	14	13	50	7	M6x16	23	313001 4201F	313001 6201F
1"	25	102	20	61	40	2,52	F.04	54	9	30x3	11	10	42	6	M5x16	25	313001 42610	313001 62610
1"	25	102	20	61	40	2,67	F.05	65	9	35x3	14	13	50	7	M5x16	25	313001 4261F	313001 6261F
1 1/4"	32	118	20	81,5	40	4,46	F.05	65	12	35x4	14	13	50	7	M6x20	33	313001 43010	313001 63010
1 1/4"	32	118	20	81,5	40	4,63	F.07	90	12	55x4	17	15	70	9	M8x20	33	313001 4301F	313001 6301F
1 1/2"	40	134	20	89	40	6,80	F.05	65	12	35X4	14	13	50	7	M6X20	40	313001 43410	313001 63410
1 1/2"	40	134	20	89	40	6,97	F.07	90	12	55x4	17	15	70	9	M8x20	40	313001 4341F	313001 6341F
2"	50	144	20	91,5	25	8,23	F.07	90	12	55x4	17	15	70	9	M8x20	50	313001 43810	313001 63810
2"	50	144	20	91,5	25	8,73	F.10	125	12	70x4	22	18	102	11	M10x25	50	313001 4381F	313001 6381F
2 1/2" **	65	160	22	101,5	25	10,02	F.07	90	12	55x4	17	15	70	9	M8x20	60	313001 44410	313001 64410
2 1/2" **	65	160	22	101,5	25	10,52	F.10	125	12	70x4	22	18	102	11	M10x25	60	313001 4441F	313001 6441F
3" **	80	200	26	116	16	20,90	F.07	90	12	55x4	17	15	70	9	M8x20	110	313001 44810	313001 64810
3" **	80	200	26	116	16	21,40	F.10	125	12	70x4	22	18	102	11	M10x25	110	313001 4481F	313001 6481F
4" **	100	240	26	131	16	33,50	F.07	90	12	55x4	17	15	70	9	M8x20	130	313001 45410	313001 65410
4" **	100	240	26	131	16	34,00	F.10	125	12	70x4	22	18	102	11	M10x25	130	313001 4541F	313001 6541F

* Maximum break-out torque in Nm

** Four way