



Muffenschrägsitzventil PN 40

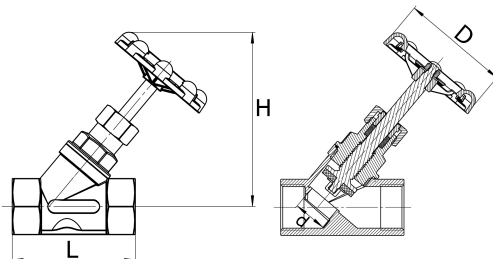

Technisches Produktblatt

DN	G	L	H	D	d	PN	kg
8	1/4"	65,5	97	62	11,6	40	0,449
10	3/8"	65,5	97	62	12,5	40	0,390
15	1/2"	65,5	97	62	12,5	40	0,386
20	3/4"	75,5	110	62	18,0	40	0,611
25	1"	90,5	117	83	23,5	40	0,887
32	1 1/4"	111,0	138	83	31,4	40	1,403
40	1 1/2"	121,0	150	114	35,7	40	1,781
50	2"	151,0	168	114	45,5	40	3,193

Verfügbare Werkstoffe: V4A



STÜCKLISTE

Nr.	Bezeichnung	Material
1.	Gehäuse	V4A
2.	Einschraubdeckel	V4A
3.	Spindel	V4A
4.	Druckhülse	V4A
5.	Überwurfmutter	V4A
6.	Stopfbuchse	PTFE
7.	Gehäusedichtung	PTFE
8.	Sitzdichtung	PTFE
9.	U-Scheibe	V4A
10.	Handrad	Alu (rot)
11.	Mutter	V2A
12.	Stopp-Mutter	V4A